


**DIN 797**    **~ISO 8737**

Standard withdrawn

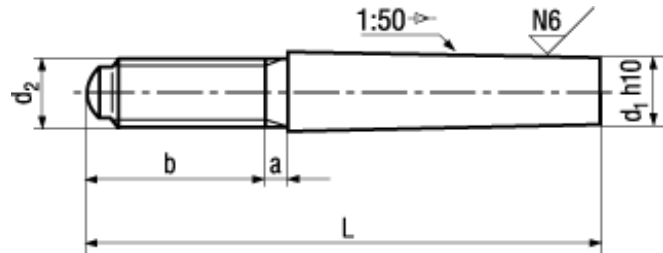

<b>BN 863</b>
<b>Taper pins with thread</b>
constant threaded stem length, unhardened, ground
Free-cutting steel
plain
<ul style="list-style-type: none"> <li>• ~SN 212784</li> <li>• ~UNI 7286</li> <li>• ~CSN 022154</li> <li>• Tolerance: h10</li> </ul>

Article#	d <sub>1</sub>	d <sub>2</sub>	b	a max.	L
1314165	5	M5	14	2,4	40
1314173					45
1314181					50
1314246	6	M6	18	3	40
1314254					45
1314262					50
1314270					55
1314289					60
1314297					65
1314300					75
1314319					85
1314327	8	M8	22	4	55
1314335					60
1314343					65
1314351					75
1314378					85
1314386					100
1314394					120
1314408	10	M10	24	4,5	65
1314416					75
1314424					85
1314432					100

Article#	d <sub>1</sub>	d <sub>2</sub>	b	a max.	L
1314440	10	M10	24	4,5	120
1314459	12	M12	27	5,3	75
1314467					85
1314475					100
1314483					120
1314556	14	M12	30	6	85
1314564					100
1314599	16	M16	35	6	85
1314602					100
1314610					120
1314645	20	M16	35	6	160
1314653	25	M20	40	7,5	140
1314661	30	M24	46	9	160